



ALFO® Standard-Blindniet -rilliert-

Aluminium Stahl verzinkt

Flachkopf | offen

CAD
DATEN
ONLINE

Serie
712

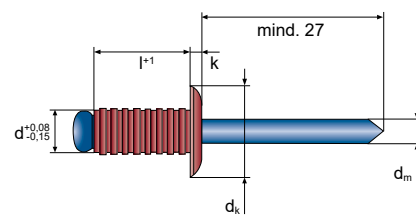

EN AW-5754 [AlMg3]

d	l +1	Mindestbohr- lochtiefe	Nr.		€/ 1.000
3,2	10,0	13,0	10712032100	500	64,56
d_k 6,5 -0,7	d_m 1,7	k 0,8 ±0,15	 3,3 mm	 600 N	 1000 N
4,0	8,0	11,0	10712040080	500	65,86
	12,0	15,0	10712040120	500	79,80
d_k 8,0 -0,7	d_m 2,0	k 1,0 ±0,15	 4,1 mm	 1000 N	 1350 N

d	l +1	Mindestbohr- lochtiefe	Nr.		€/ 1.000
4,8	10,0	14,0	10712048100	500	94,92
	16,0	20,0	10712048160	500	143,07
d_k 9,5 -0,7	d_m 2,7	k 1,1 ±0,15	 4,9 mm	 1350 N	 1820 N